



# BRIDEX

**FE** Fuji Electric  
Innovating Energy Technology

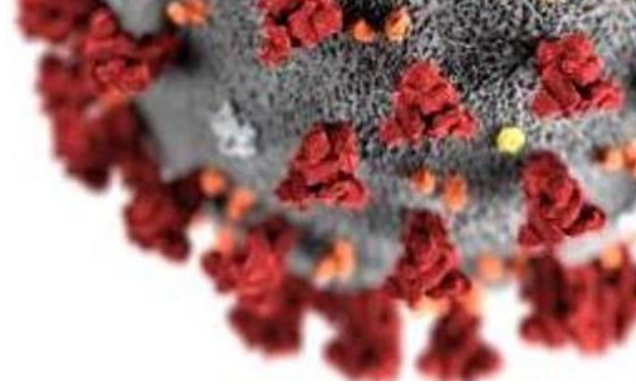

# ThermalCheck++

## AI BINOCULAR THERMAL IMAGING SYSTEM

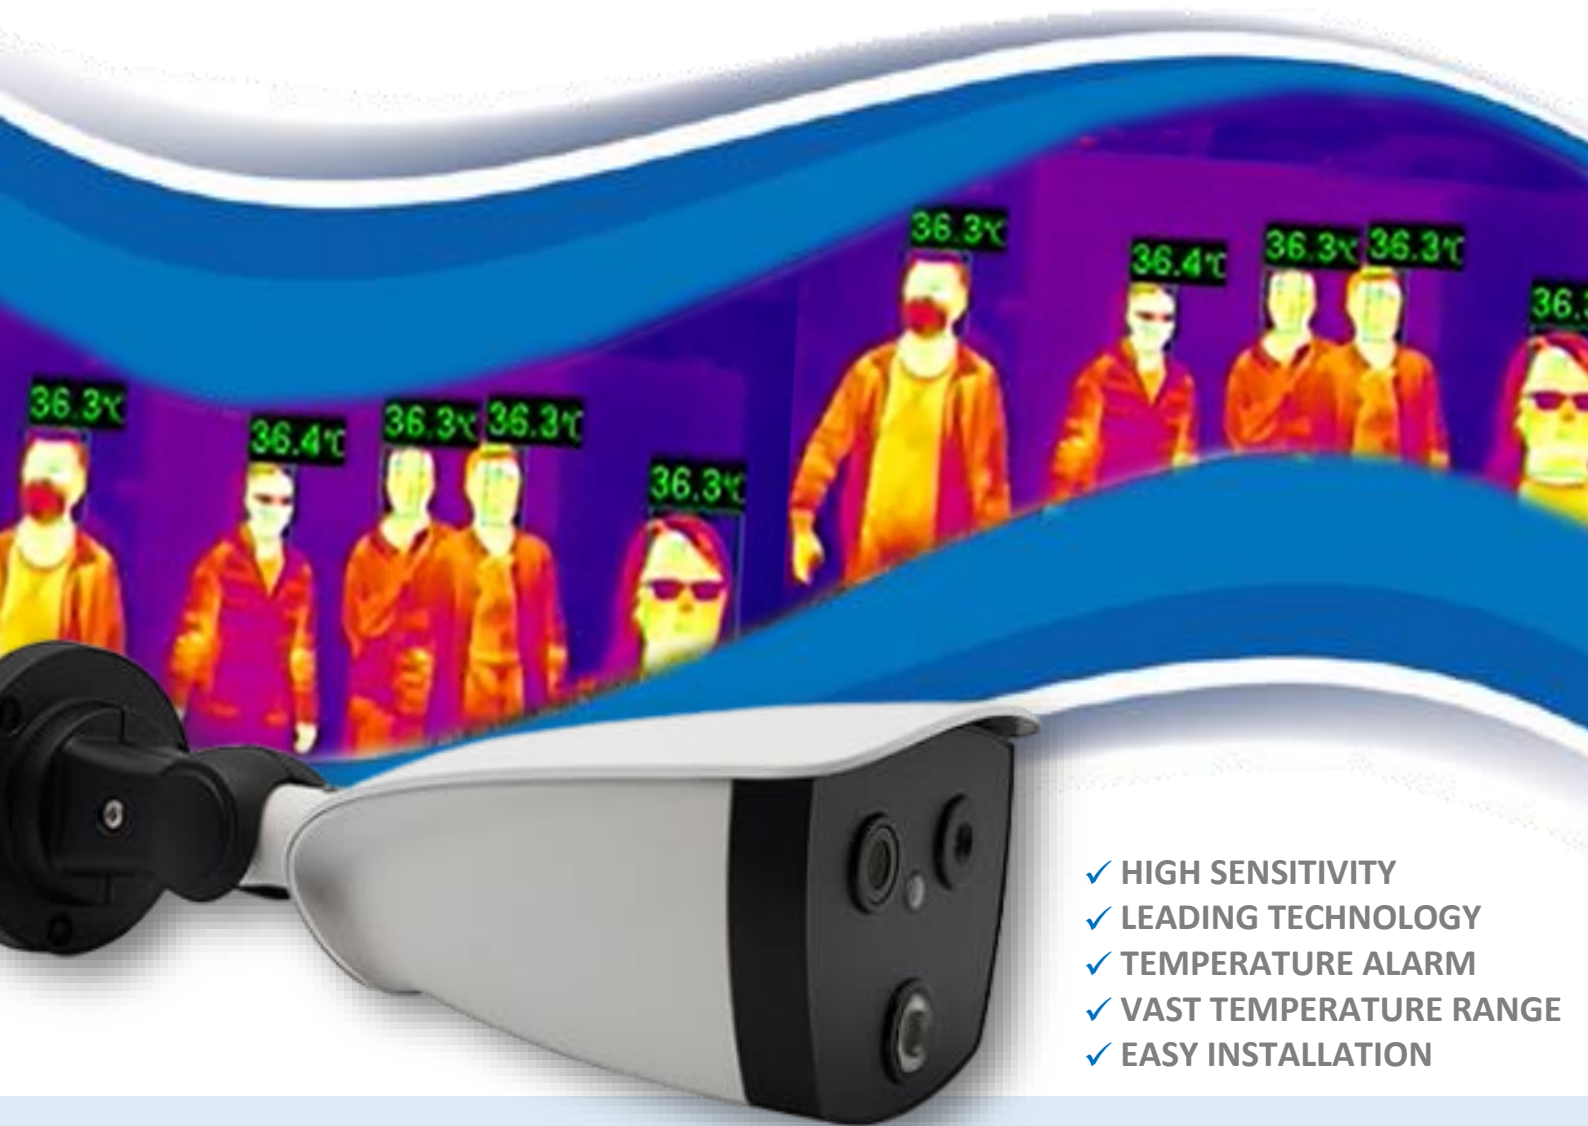

- ✓ HIGH SENSITIVITY
- ✓ LEADING TECHNOLOGY
- ✓ TEMPERATURE ALARM
- ✓ VAST TEMPERATURE RANGE
- ✓ EASY INSTALLATION



FACE  
RECOGNITION



OUTDOOR  
FRIENDLY



DETECT LARGE  
CROWD



SAVE  
LABOUR COST



CONTACTLESS



# ThermalCheck++

## AI BINOCULAR THERMAL IMAGING SYSTEM

### How do you temperature screen large crowds?

Our Infrared Thermal Camera uses front-end visible light together with infrared dual spectrum vanadium oxide high-precision temperature sensing probes and the most advanced **FLIR** infrared chip technology from the United States. No external black body is required and automatically calibrated internally.

## Features

- ★ **High Sensitivity Thermal Module** with 256 x 192 resolution NETD is less than 60 mk (@25° C, F#=1.0)
- ★ Supports contrast adjustment
- ★ **Leading Thermal Image Processing Technology**, Adaptive AGC, DDE, 3D DNR
- ★ Up to 15 palettes of adjustable colour
- ★ **Reliable** temperature-anomaly alarm
- ★ Temperature range from -15°C to +150°C
- ★ **High Quality** optical module with 2 MP resolution
- ★ Bi-spectrum image fusion, picture-in-picture preview
- ★ **Contactless** and handsfree
- ★ Highly efficient providing **Labour Cost Savings**
- ★ Suitable **Indoors & Outdoors**
- ★ **Automatic** image acquisition, face detection, face mask detection, face recognition comparison, body temperature detection, snap shot for abnormal body temperature
- ★ **High Precision** temperature sensing up to ±0.1°C accuracy
- ★ Detection distance can reach 5 meters
- ★ **Multiple-Target Simultaneous** detection, up to 5 persons simultaneously
- ★ **Detects 160 – 200 People** per minute

### Scope of Application:



## Technical Specifications:

Model	ThermalCheck++ (AI Binocular Thermal Imaging System)		
	FB-TC01		
<b>Thermal</b>		<b>Feature</b>	
Image Sensor	VOx Uncooled Focal Plane Arrays	Bi-spectrum Image Fusion	Fusion view of thermal view and overlaid details of the optical channel
Resolution	256x192		
Pixel Interval	12μm	Picture in Picture	Combines details of thermal and optical image PIP, overlay thermal image on optical image
NETD	Less than 60 mK (@25°C,F#=1.1)		
Aperture	F1.0	<b>Smart Function</b>	
Field of View	35° x 27° (H x V)	Face snapping	Built-in deep learning AI algorithm, Supports simultaneous detection of 20-30 faces
<b>Optical</b>			
Image Sensor	1/2.8" 2.0M Pixel CMOS	Temperature Measurement	Support global and local temperature
Resolution	1920x1080P	Temperature Range	From -15°C to +150°C
Min. Illumination	Color: 0.005Lux @ (F1.2, AGC ON), B/W: 0.001 Lux @ (F1.2, AGC ON)	Temperature Accuracy	Target temperature 35°C ^ 38°C ±0.3 °C. Target temperature 20°C ^ 33°C ±0.6 °C. Target temperature 38°C ^ 50°C ±0.6 °C.
Field of View	84° x 45° (H x V)		
Focal Length	4mm		
Shutter Speed	1s to 1/100,000s	<b>General</b>	
White Balance	Auto/Manual/ATW (Auto-tracking White Balance) /Indoor/Outdoor/Daylight Lamp/Sodium Lamp	Web Client Language	Languages in English, Chinese
Day & Night	ModelR cut filter with auto switch	Power	DC 12V, 0.65A
WDR	80 dB	Work Temperature / Humidity	From -20°C to 55°C; Humidity: 95% or Less
<b>Network</b>		Protection Level	IP67
Main Stream	Thermal: 25fps (1920 x 1080, 1280 x 720)	Dimension	246 mm x 101 mm x 81 mm (with bracket)
Sub Stream	Thermal: 25fps (704 x 576, 352 x 288)	Weight	Approx. 1.0 kg
Video Compression	H.264 (Baseline/Main/High Profile) /MJPEG/H.265		
Audio Compression	G .711u/G.711a/G.722.1/MP2L2/G.726/PCM		
Protocols	TCP/IP, ONVIF, GB/T 28181, DHCP, RTP, RTSP, PPPoE, UPnP, UDP		
API	ONVIF (Profile S, Profile G, Profile T), SDK		



# BRIDEX

**FE** Fuji Electric  
Innovating Energy Technology

## View of product:



## View in Computer:



**Find out MORE!**

**FUJI BRIDEX PTE LTD**

**No. 15 Senoko Way, Singapore 758036**

 **+65 6756 0833**

 **sales@bridex.fujielectric.com**

 **www.bridex.fujielectric.com**